



Emergency eyewash with pedestal and side manual lever. Zinc plated steel with epoxy paint coating and polypropylene.

**Description**

- Emergency eyewash, manual opening.
- High flow at low pressure.
- Activated by side lever.
- Double aerated jet with dust cap.
- Color green RAL 6029.
- Suitable for industries, laboratories and generally where there is a risk of personal injury from fire, acids, chemical reagents, petroleum products, radioactive materials or other contaminants.
- CE conformity.


**Suggested text for prescription**

Emergency eyewash with pedestal NOFER or equivalent, high flow at low pressure with full flow valve, instantaneous automatic opening and automatic manual closing by means of lateral push lever. Galvanized steel body with green epoxy paint coating, green polypropylene eyewash catcher.

**Technical characteristics**

- Body material:** Galvanized steel with epoxy paint
- Color:** Green
- Collector material:** Polypropylene
- Material connecting parts:** brass
- Pickup dimensions:** Ø255 mm
- Flow rate:** 14 l/min ± 10%.
- Minimum flow rate required at 2 bar:** 6 l/min
- Water inlet:** 1 + 1/4 " thread
- Water outlet:** 1 + 1/4 " thread

**Dimensional drawing**

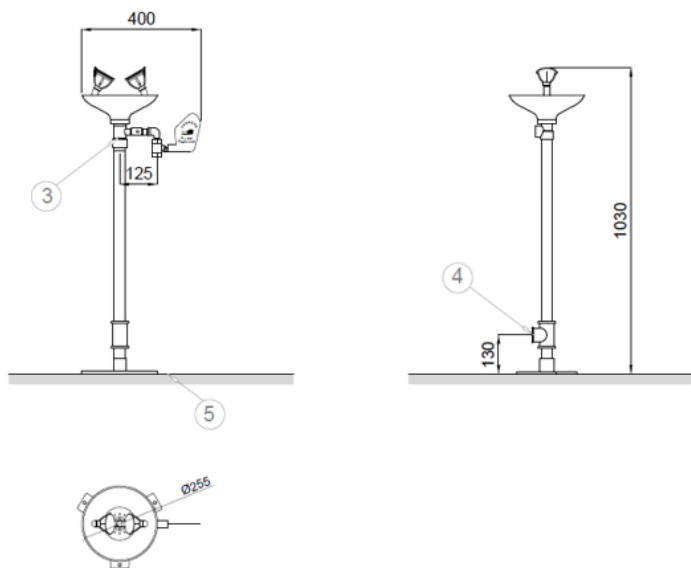



08980 | Sant Feliu de Llobregat,  
Barcelona - Spain  
T. +34 934 742 423  
F. +34 934 743 548  
nofer@nofer.com  
www.nofer.com

RELATED PRODUCTS



SC300.



SC300SS



SC310.

These specifications may be modified and/or amended due to manufacturing requirements.