



Hand-operated safety shower on pedestal.  
Zinc plated steel with epoxy paint coating and stainless steel.

#### Description

- Emergency shower on pedestal.
- Full flow valve, manual and instantaneous opening.
- Activated by rigid lever with triangular handle.
- Color green RAL 6029.
- Suitable for industries, laboratories and generally where there is a risk of personal injury from fire, acids, chemical reagents, petroleum products, radioactive materials or other contaminants.
- CE conformity.

#### Suggested text for prescription

Emergency shower on pedestal NOFER or equivalent, manually operated, in galvanized steel with green epoxy paint coating and stainless steel sprayer. Includes full flow valve with automatic instantaneous opening and rigid tie rod for its operation with triangular handle. Shower flow: 120 l/min.

#### Technical characteristics

**Body material:** Galvanized steel with epoxy paint

**Head material:** Stainless steel

**Color:** Green

**Material connecting parts:** brass


**Minimum flow rate required at 2 bar:** 6 l/min

**Shower flow rate at 3 bar:** 120 l/min

**Water inlet:** 1 + 1/4 " thread

**Water outlet:** 1 + 1/4 " thread

#### Dimensional drawing

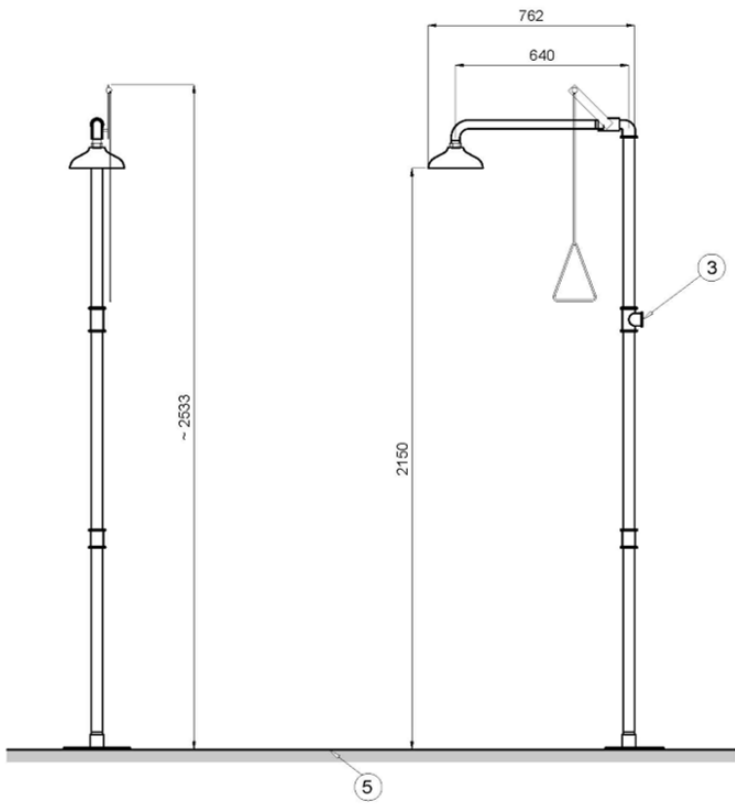

3 INGRESO 1 1/2" G. FILETO FEMMINILE.  
 ENTRADA DE 1 1/2" G. ROSCA HEMBRA.  
 1 1/2" G. INNER THREAD INLET.  
 ENTRÉE DE GAZ 1 1/2" FEMELLE.

5 PAVIMENTO FINITO.  
 SUELO ACABADO.  
 FINISHED FLOOR.  
 SOL FINI.



Ctra. Laureà Miró, 385-387  
 08980 | Sant Feliu de Llobregat,  
 Barcelona - Spain  
 T. +34 934 742 423  
 F. +34 934 743 548  
 nofer@nofer.com  
 www.nofer.com

RELATED  
 PRODUCTS



SC800.



SC820.



SC820SS

These specifications may be modified and/or amended due to manufacturing requirements.