



Vertical hand-operated safety shower for ceiling mounting. Zinc plated steel with epoxy paint coating and polypropylene.

Description

- Vertical emergency shower to be attached to the ceiling.
- Full flow valve, instant automatic opening and manual closing.
- Actuated by means of rigid tie rod with triangular handle.
- RAL 6029 green pipe.
- Suitable for industries, workshops, laboratories, and in general wherever there is a risk of damage to personnel due to fire, acids, reagents, petroleum products, radioactive materials or any other contaminating element.
- Conforms to European Directive 93/42/EEC.

Suggested text for prescription

NOFER hand-operated vertical safety shower or equivalent, in galvanized steel with green epoxy paint coating and green polypropylene sprayer. Includes full flow valve with automatic instantaneous opening and rigid tie rod for its operation with triangular handle. Shower flow: 120 l/min.

Technical characteristics

Body material: Galvanized steel with epoxy paint

Head material: Polypropylene

Head dimensions: Ø205 mm

Color: Green

Material connecting parts: brass


Minimum flow rate required at 2 bar: 6 l/min

Shower flow rate at 3 bar: 120 l/min

Recommended installation height: 2.15 m from the ground

Water inlet: 1" Gas female

Dimensional drawing

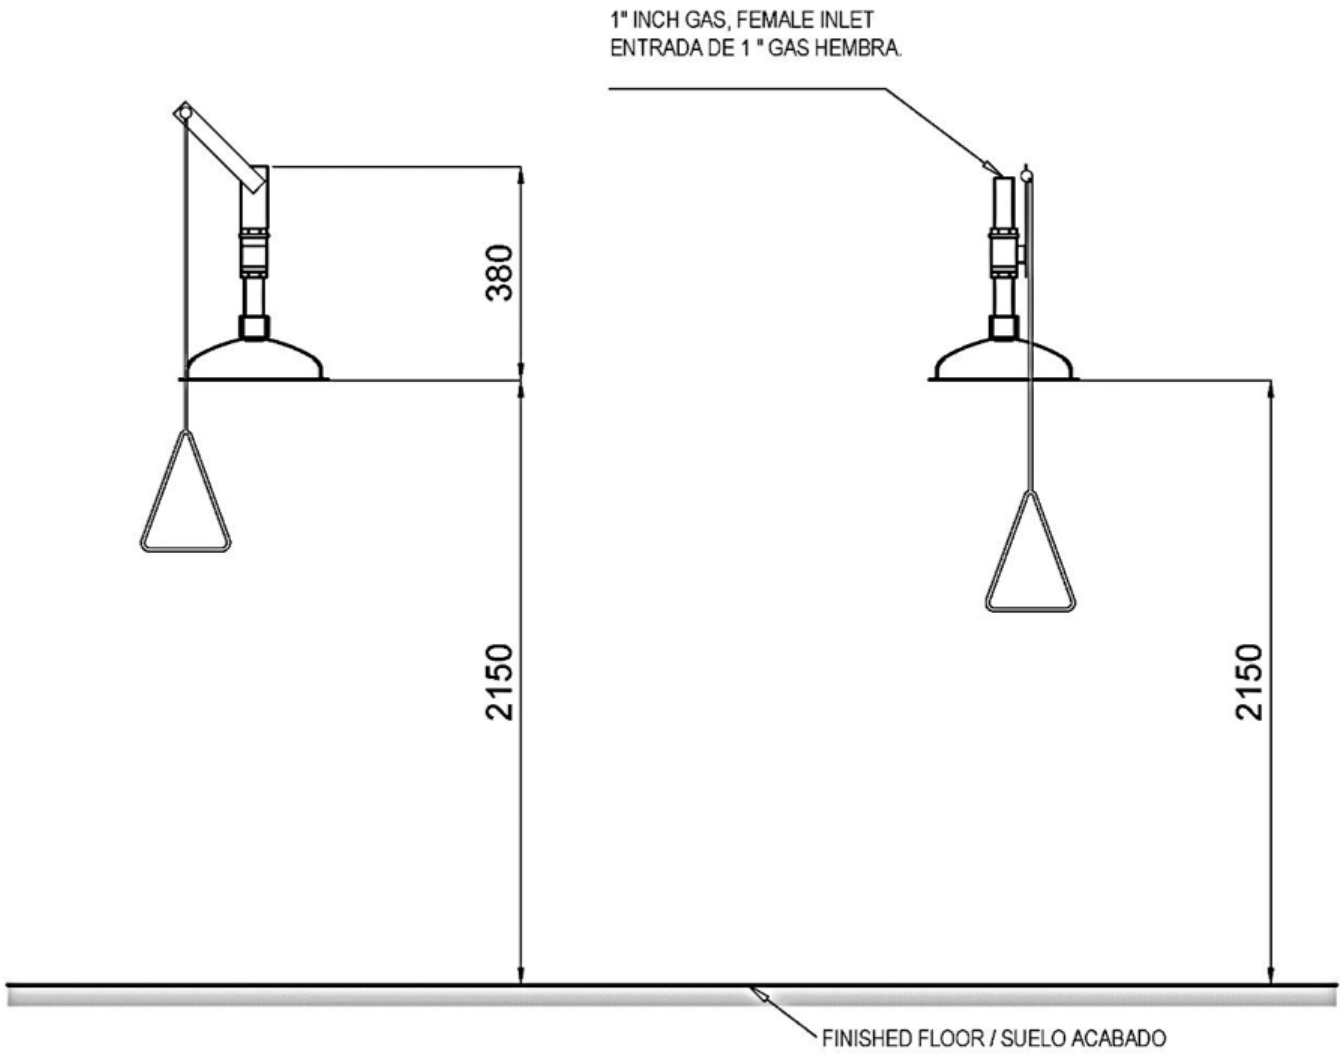

Ctra. Laureà Miró, 385-387
08980 | Sant Feliu de Llobregat,
Barcelona - Spain
T. +34 934 742 423
F. +34 934 743 548
nofer@nofer.com
www.nofer.com

RELATED
PRODUCTS



These specifications may be modified and/or amended due to manufacturing requirements.