


Range : Deck-mounted mixer tap

Ref : 68032 - PRESTO 3000

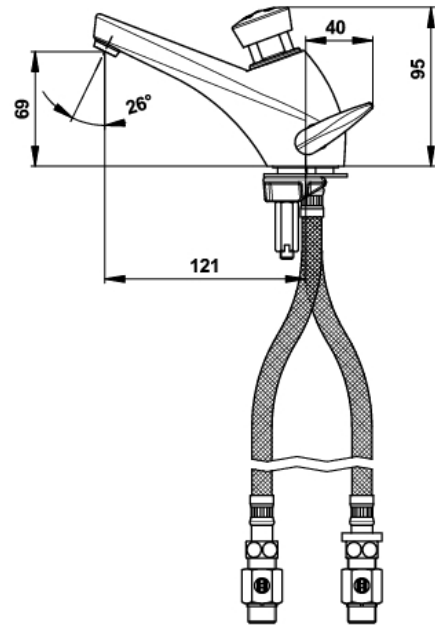

> **Working pressure :**

- 1 to 5 bar

> **Flow :**

- 3 l/min at 3 bar - 4-position flow adjustment device
- Anti-water-hammering design

> **Flow time :**

- 15 seconds (± 5 sec.)

> **Hydraulic supply :**

- G 3/8" (12x17)

> **Thermal resistance :**

- Resistant to a temperature of 75°C for 30 minute thermal shock

> **Security :**

- Non-turnable push button
- Non-removable, wear-proof red marker

> **Delivered with :**

- 2 PEX Hoses with NF check valves and revolving nut
- 2 MM G 3/8" (12x17) Stop valves
- 2 Filter gaskets
- 1 Stainless steel plain washer
- Fixing bracket
- 1 Flange gasket
- 1 Brass clamping nut
- Instruction manual

> **Standards & approvals :**

- Brass body in accordance with EN 1982, EN 12164, EN 12156
- Molded chrome-plated body in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

